


Insulated Flexible Gas Hose

1/2" Nut- 1/2" (M/F) Cooker - Oven - Stove


KAS



Product Name	Insulated Flexible Gas Hose 1/2" Nut- 1/2" (M/F) Cooker - Oven - Stove
Standard	TS 10670
Working Temperature	Max. 60°C
Working Pressure	0,5 Bar up to 16 Bar
Intended Use	Gas Application

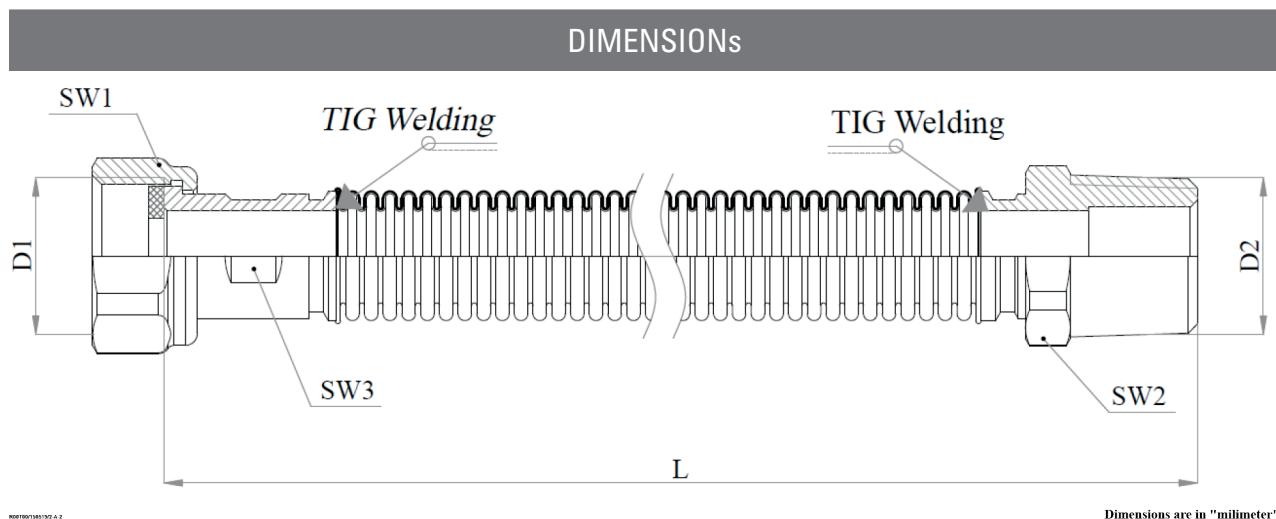

Code	DN	D1 (inch)	D2 (inch)	SW1 (mm)	SW2 (mm)	SW3 (mm)	L (cm)
41.11.030	12	G 1/2"	Rp 1/2"	24	22	15	30
41.11.040	12	G 1/2"	Rp 1/2"	24	22	15	40
41.11.050	12	G 1/2"	Rp 1/2"	24	22	15	50
41.11.060	12	G 1/2"	Rp 1/2"	24	22	15	60
41.11.070	12	G 1/2"	Rp 1/2"	24	22	15	70
41.11.080	12	G 1/2"	Rp 1/2"	24	22	15	80
41.11.090	12	G 1/2"	Rp 1/2"	24	22	15	90
41.11.0100	12	G 1/2"	Rp 1/2"	24	22	15	100
41.11.0120	12	G 1/2"	Rp 1/2"	24	22	15	120
41.11.0150	12	G 1/2"	Rp 1/2"	24	22	15	150



Insulated Flexible Gas Hose 1/2" Nut- 1/2" (M/F) Cooker - Oven - Stove



MATERIALs	
Corrugate Hose	304-L
Nipple	St37
Tube	St37
Nut	St37
Gasket	BA-203
Cover	Polyolefin (Yellow)

SURFACEs FINISH	
NIPPLE	NICKEL
TUBE	NICKEL
NUT	NICKEL

Cooker-Oven-Stove Hose INSTALLATION and USAGE INSTRUCTION

The following instructions contain information about the installation of the product which is acknowledged in the market as "Cooker-Oven-Stove Hose" that is manufactured by Kayalar Pres Döküm San. ve Tic. Ltd. Şti.

This product is a flex hose assembly dedicated for use in indoors gas burning devices.

The failure/damage of any single part of the product results in the requirement of complete renewal/change of the product.

This product consists of a flexible hose, nut+coupling and a nipple. And is used in gas burning devices

Operating pressure is from 0,5 bar up to 16 bars.

This product can be used with Natural gas, LPG etc.

This product is manufactured in accordance with TS 10670

Check the length of the product and the appropriateness of the fittings before installation

During the installation, sealing materials that are suitable for natural gas and LPG can be used.

Be sure that a sealing element is readily available in the package

Be sure that the sealing element is intact and has no deformation or damage on it.

Via testing, be sure that there is no gas leakage after the product is installed in place.

If the sealing element is not intact, meaning damaged, deformed etc., change it with new.

Hose assembly **MUST** be installed without any twisting, and within a free and reachable place

Two or more number of hose assemblies shall **NOT** be added together in order to increase the total length

Hose assembly shall **NOT** be installed directly on the wall, floor or ceiling.